



Replaceable Insert for the Hire Jig

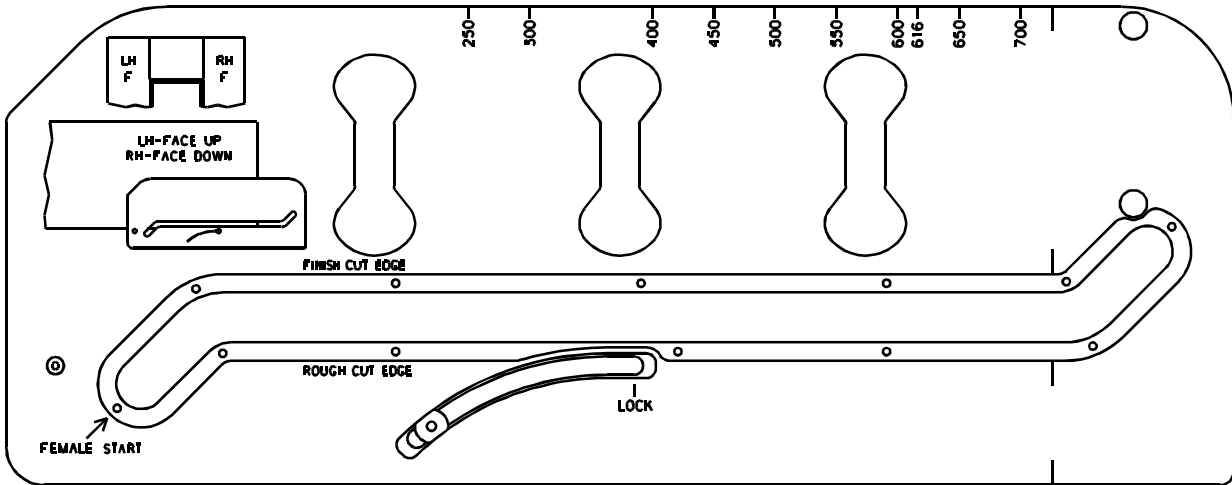

1. Remove the 12 screws which holds the insert in place. Do not discard the screws.
2. Remove the damaged insert from the jig.

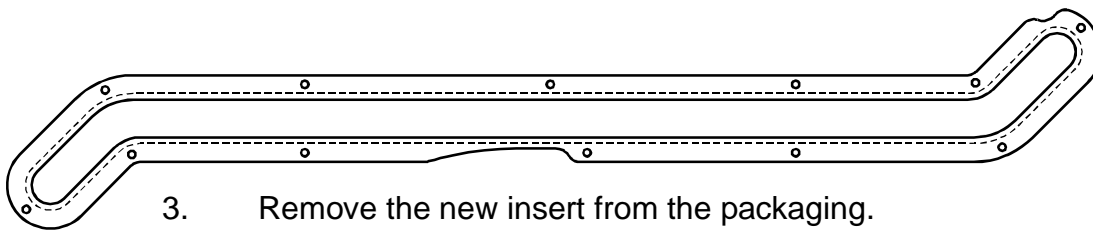

3. Remove the new insert from the packaging.
4. Make sure the new insert, and the worktop jig is clean before assembling.
5. Screw the insert into the jig in the sequence shown below and do not over tighten the screws - this will ensure that the geometry of the insert will not distort.

